



J3GxxxM2LD Gas Discharge Tube

Rev.1.2

FEATURE

- ✧ Eliminates small size design EIA 5.5×6.0mm.
- ✧ Current handling capability 3,000A@8/20μs.
- ✧ Low capacitance and insertion loss.
- ✧ Fast response and long service life.
- ✧ Reliable to protect electrostatic surge.
- ✧ Moisture sensitivity level: Level 1.
- ✧ Storage and Operational Temperature:-40℃~85℃



Exterior



Schematic symbol

APPLICATION INFORMATION

- ✧ Repeaters, modems.
- ✧ Telephone interface, line cards.
- ✧ Data communication equipment.
- ✧ Line test equipment.

ELECTRICAL CHARACTERISTICS

Part number	DC breakdown voltage 100V/s(V)	Tolerance of Vs	Impulse spark-over voltage 1KV/μs(V)	Impulse discharge current 8/20μs(A)	Insulation resistance		Co (1MHz)	Marking Code
					GΩ	DC(V)		
J3G152M2LD	1500	1200-1800	≤2800	3000	≥1	250	≤1.5pF	2R 1500
J3G302M2LD	3000	2400-3600	≤4500	3000	≥1	250	≤1.5pF	2R 3000
J3G362M2LD	3600	2800-4400	≤5500	3000	≥1	250	≤1.5pF	2R 3600

1. The parameters of all tested by ITU-T K12.
2. Total Impulse discharge current 3,000A@ 8/20μs by IEC 61000-4-5, 1 shots.
3. The capacitance is tested by 1MHz@DC=0.5V.
4. The V-T waveform of DCBV and IPBV mus lie between the shades.

PART NUMBERING SYSTEM

J3G 152 M 2L D
 (1) (2) (3) (4) (5)

(1) JieJie 3KA gas discharge tube


(2) DC breakdown voltage, e.g., 152=15×10²=1500V

(3) Tolerance is DC breakdown voltage, M=+-20%, N=+-30%

(4) 2-electrod DIP

(5) Dimension in 5.5×6.0 (mm)


PRODUCT DIMENSIONS (unit: mm)

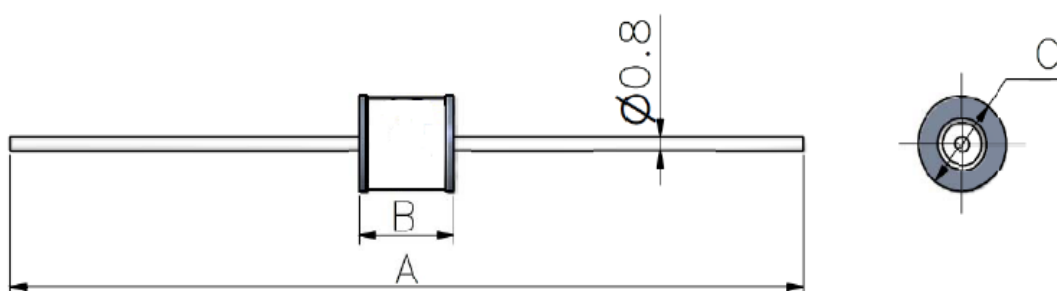


REF	mm	inch
A	62±2	2.441±0.079
B	6±0.2	0.236±0.008
C	Φ5.5±0.2	Φ0.217±0.008

REFLOW PROFILE

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquidus)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		~10 secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

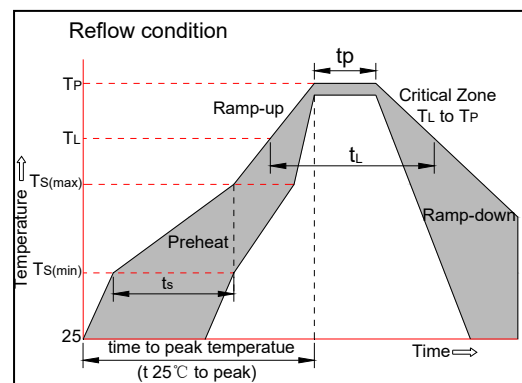

PACKAGE BOX INFORMATION

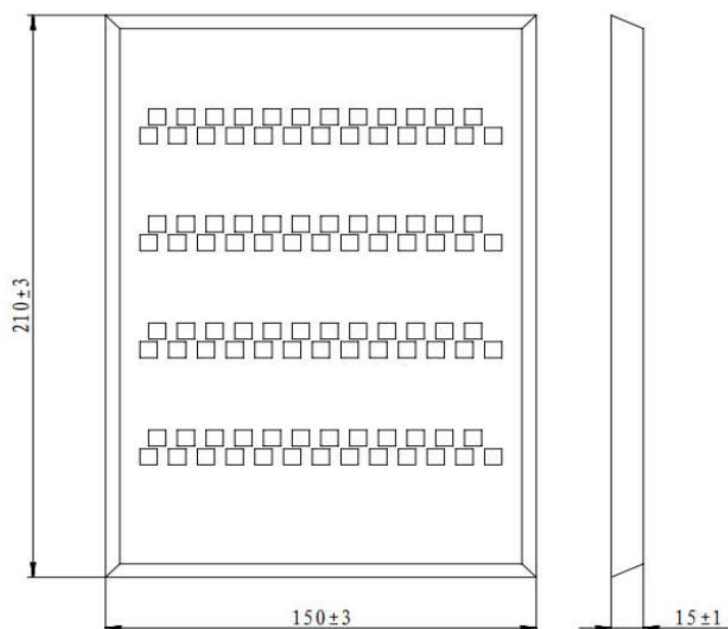

100pcs/box

PACKAGING

Part No.	BOX Quantity (pcs)	Per Carton (pcs)
J3GxxxM2LD	100	10,000

JieJie products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable JieJie product documentation. Warranties granted by JieJie shall be deemed void for products used for any purpose not expressly set forth in applicable JieJie documentation. JieJie shall not be liable for any claims or damages arising out of products used in applications not expressly intended by JieJie as set forth in applicable JieJie documentation. The sale and use of JieJie products is subject to JieJie terms and conditions of sale, unless otherwise agreed by JieJie.

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.2nd version which is made in 26-May-2025. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright ©2025 Jiangsu JieJie Microelectronics Co., Ltd. Printed All rights reserved.