



JOCHA22B-D8P/S Series

Rev.A.1.0

DESCRIPTION:

The products are 2MBd high-speed opto-couplers. The device is a small-outline coupler suitable for surface-mount assembly. It consists of a high-output-power infrared LED optically coupled to a high-speed photodiode-transistor chip. It is housed in a plastic DIP8 package with different lead forming options package and guarantees a creepage distance of ≥ 5 mm, a clearance of ≥ 5 mm and an insulation thickness of ≥ 0.4 mm. Therefore, it meets the reinforced insulation class requirements of international safety standards. The products are widely used in programmable controllers, industrial inverters and switching power supplies.

MAIN FEATURES

High isolation 5000 VRMS

High speed – 2MBd typical

Operating temperature range -40°C to 110°C

REACH & RoHS compliance

HBM: H3A; MM: M4; CDM: C3

CQC approved

VDE approved


UL approved



JOCHA22B-D8P



JOCHA22B-D8S



Truth Table

LED	Output
ON	L
OFF	H

ABSOLUTE MAXIMUM RATINGS (Temperature= 25°C)

Parameter		Symbol	Value	Unit
Input	Forward Current	I_F	50	mA
	Peak Forward Current	I_{FP}	1 ^①	A
	Reverse Voltage	V_R	6	V
	Input Power Dissipation	P_D	100	mW

Output	Supply Voltage	V_{CC}	35	V
	Output Voltage	V_O	20	V
	Output Current	I_O	8	mA
	Output Power Dissipation	P_O	100	mW
Total Power Dissipation		P_{tot}	200	mW
Isolation Voltage		V_{iso}	5000 ^②	V _{rms}
Operating Temperature		T_{opr}	-40~110	°C
Junction Temperature		T_j	125	°C
Storage Temperature		T_{stg}	-55~125	°C
Soldering Temperature		T_{sol}	260	°C

NOTE1: 100μs pulse, 100Hz frequency

NOTE2: AC for 1minute, R.H.=40~60%

ELECTRICAL CHARACTERISTICS (Temperature=25°C)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V_F	$I_F=10mA$	-	1.35	1.6	V
	Reverse Current	I_R	$V_R=6V$	-	-	1	μA
	Input Capacitance	C_{in}	$V=0, f=1MHz$	-	60	-	pF
Output	High Level Output Current	I_{OH}	$I_F=0mA, V_{CC}=5.5V, V_O=5.5V$	-	3	500	nA
			$I_F=0mA, V_{CC}=15V, V_O=15V$	-	-	50	μA
	Low Level Supply Current	I_{CCL}	$I_F=10mA$	-	-	1.3	mA
	High Level Supply Current	I_{CCH}	$I_F=0mA$	-	-	1.3	mA
	Logic Low Output Voltage	V_{OL}	$I_F=16mA, I_O=2.4mA, V_{CC}=4.5V$	-	-	0.4	V
	Isolation Resistance	R_{iso}	DC500V 40~60%R.H.	10^{12}	10^{14}	-	Ω
	Floating Capacitance	C_{IO}	$V=0, f=1MHz$	-	0.8	-	pF


Switching Characteristics	LED Trigger Current	I_{FT}	$I_O=0.75mA$, $V_O<0.8V$	-	-	5	mA
	Propagation Delay Time to Logic Low	TPHL	$I_F=0\rightarrow 10mA$, $R_L=20k\Omega$, $C_L=100pF$	30	150	400	ns
			$I_F=0\rightarrow 10mA$, $R_L=20k\Omega$, $C_L=10pF$	-	70	-	ns
	Propagation Delay Time to Logic High	TPLH	$I_F=10\rightarrow 0mA$, $R_L=20k\Omega$, $C_L=100pF$	150	350	550	ns
			$I_F=10\rightarrow 0mA$, $R_L=20k\Omega$, $C_L=10pF$	-	110	-	ns
	Common Mode Transient Immunity at Logic High	CM_H	$I_F=0mA$, $V_{CM}=1500V_{pp}$, $R_L=20k\Omega$	± 20	± 25	-	kV/ μs
	Common Mode Transient Immunity at Logic Low	CM_L	$I_F=10mA$, $V_{CM}=1500V_{pp}$, $R_L=20k\Omega$	± 20	± 25	-	kV/ μs

ORDERING INFORMATION

J	OC	H	A	2	2	B	-D8P/S	/
JieJie Microelectronics Co., Ltd.	Opto Coupler	High speed	Single OC				P:DIP8 S:SMD8	S:T3 L:T4
							B:5mA/20%<CTR≤60% E:CTR≥300%	
						2MBd high speed		
				10V<V _{cc} ≤35V				

Packing Quantity			
Option	Quantity	Quantity – Inner box	Quantity –Outer box
DIP	50 Units/Tube	40 Tubes/Inner box	5 Inner box/Outer box =10k Units
SMD	1200 Units/Reel	2 Reels/Inner box	5 Inner box/Outer box =12k Units

MARKING

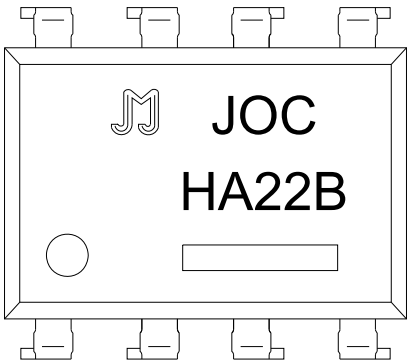	
---	--

Characteristics Curves

FIG.1: Forward Current vs. Forward Voltage

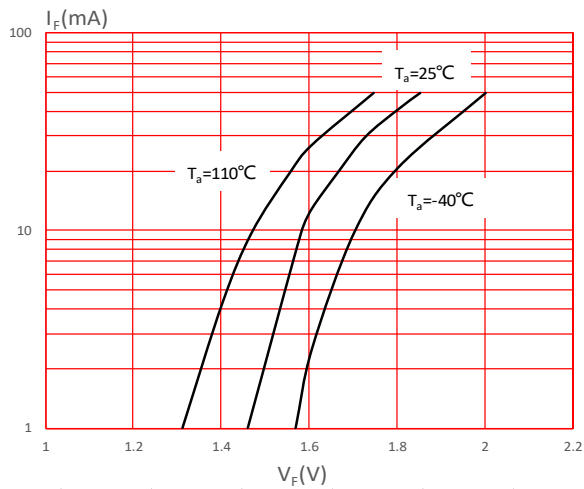


FIG.3: Output Current vs. Forward Current

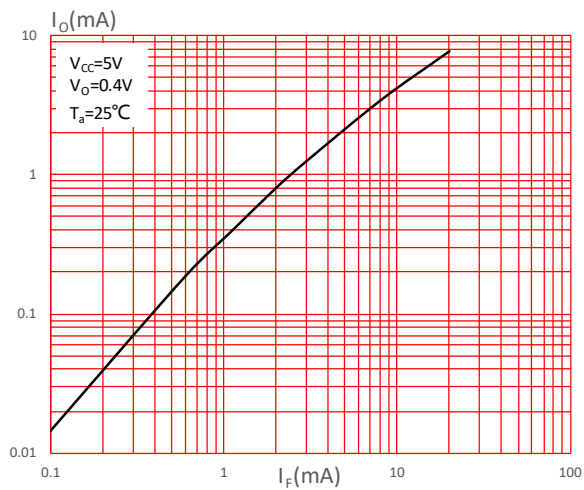


FIG.5: Output Current vs. Output Voltage

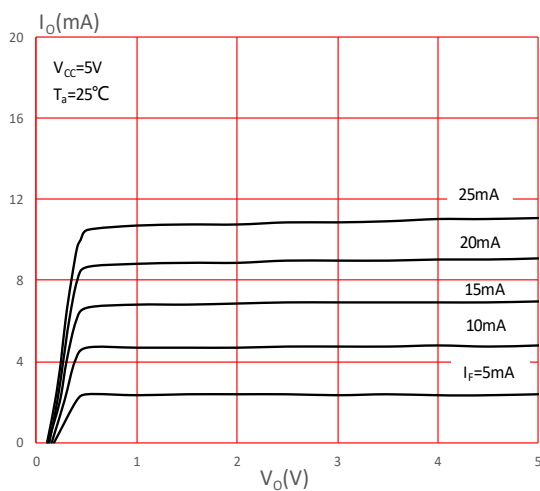


FIG.2: High Level Output Current vs. Ambient Temperature

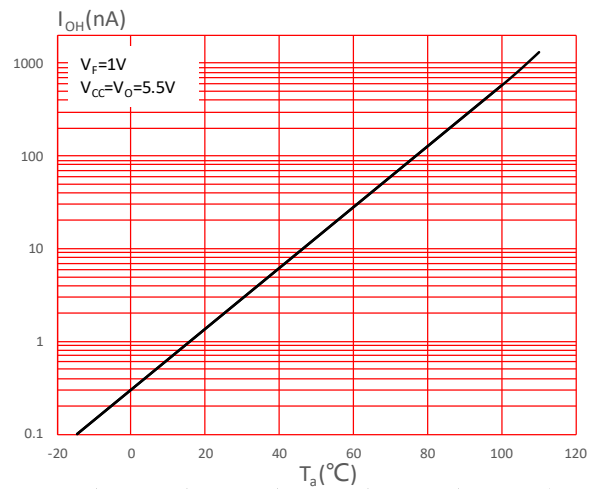


FIG.4: Threshold Input Current vs. Ambient Temperature

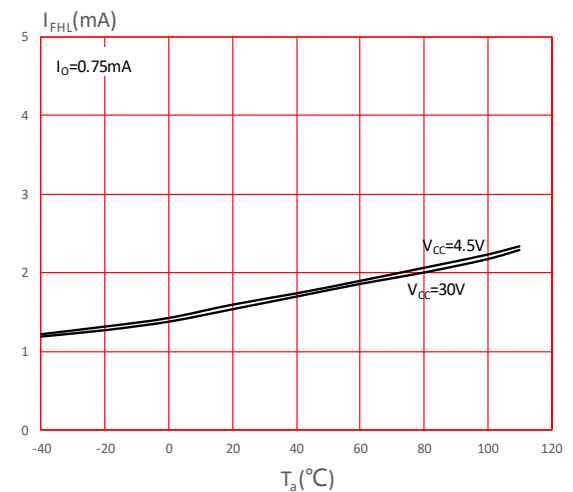


FIG.6: Low Level Output Voltage vs. Ambient Temperature

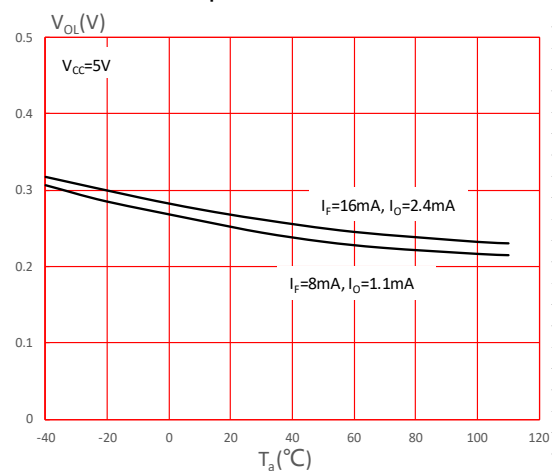


FIG.7: Propagation Delay vs. Load Resistance


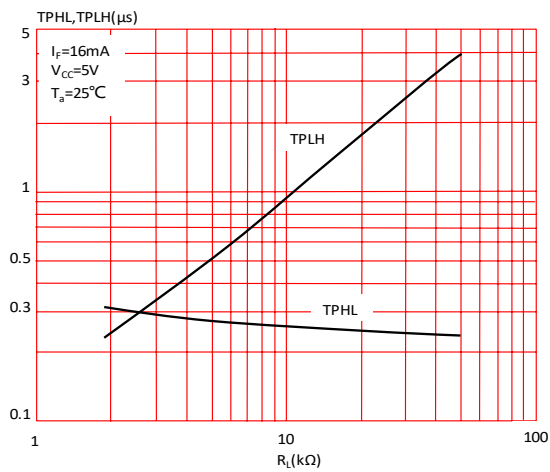


FIG.8: Propagation Delay vs. Ambient Temperature

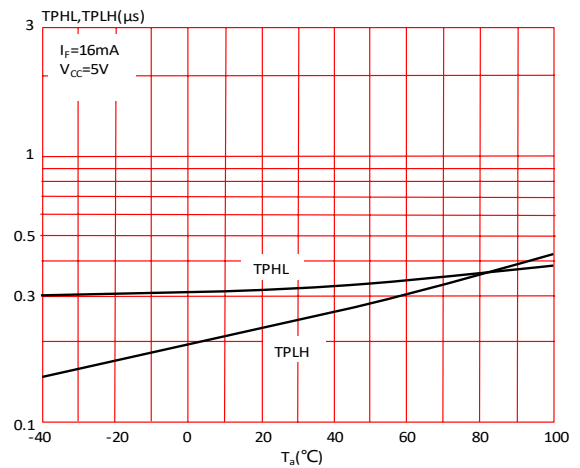

TEST CIRCUITS

Fig.9: Switching Time Test Circuit and Waveform





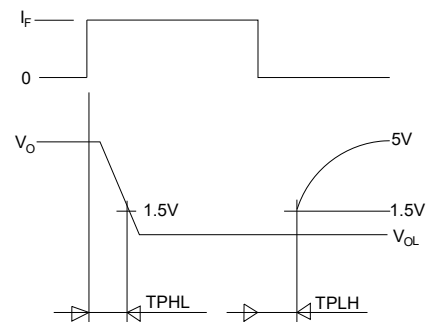


Fig.10: CMTI Test Circuit and Waveform

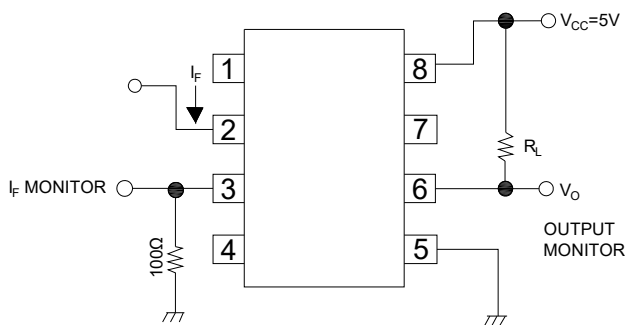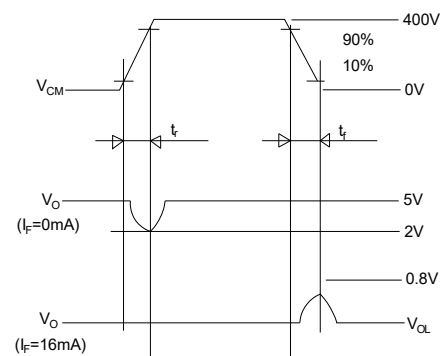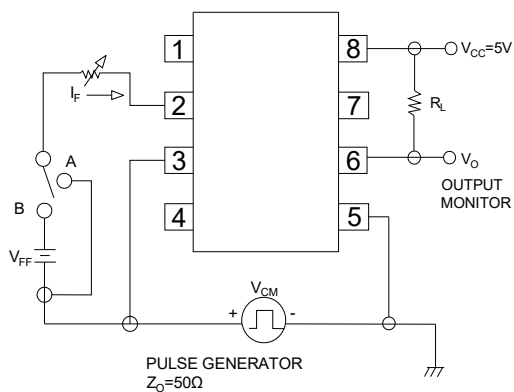


Package Dimension (Unit: mm)

Standard DIP Type:

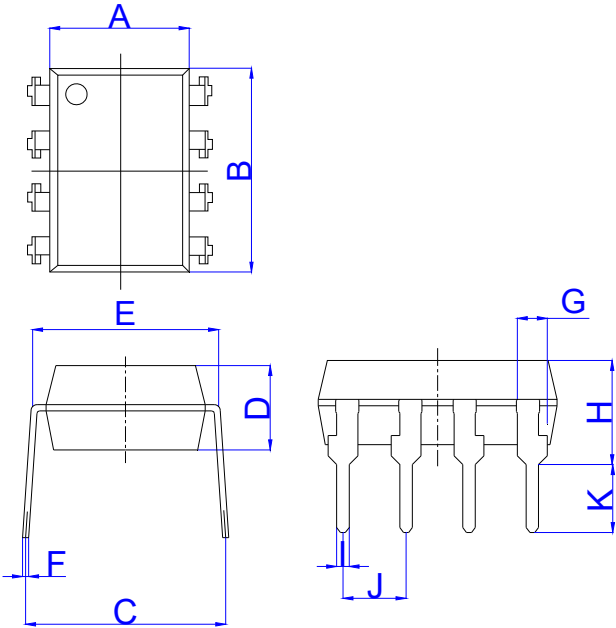


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.20		6.60	0.244		0.260
B	9.40		9.80	0.370		0.386
C	7.15		8.95	0.281		0.352
D	3.20		3.60	0.126		0.142
E	7.32		7.92	0.288		0.312
F	0.15		0.35	0.006		0.014
G	0.90		1.50	0.035		0.059
H	3.90		4.50	0.154		0.177
I	0.40		0.60	0.016		0.024
J	2.29		2.79	0.090		0.110
K	2.24		3.24	0.088		0.128

Option SMD Type:

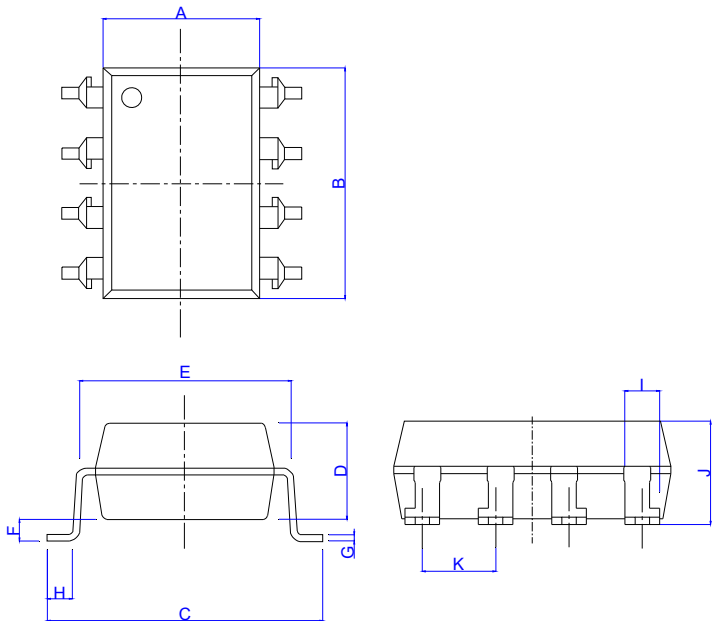


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.20		6.60	0.244		0.260
B	9.40		9.80	0.370		0.386
C	9.50		10.50	0.374		0.413
D	3.20		3.60	0.126		0.142
E	7.32		7.92	0.288		0.312
F	0.05		0.35	0.002		0.014
G	0.16		0.36	0.006		0.014
H	0.60		1.40	0.024		0.055
I	0.90		1.50	0.035		0.059
J	3.30		3.90	0.130		0.154
K	2.29		2.79	0.090		0.110

RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

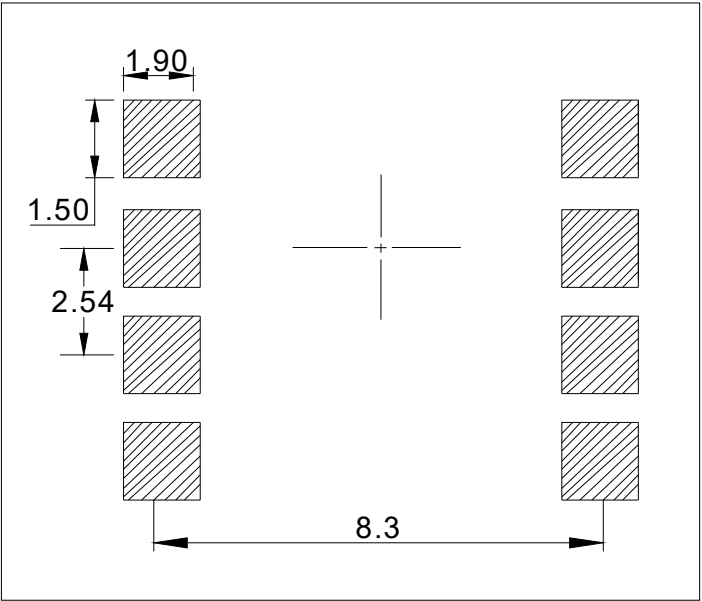


TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Standard DIP

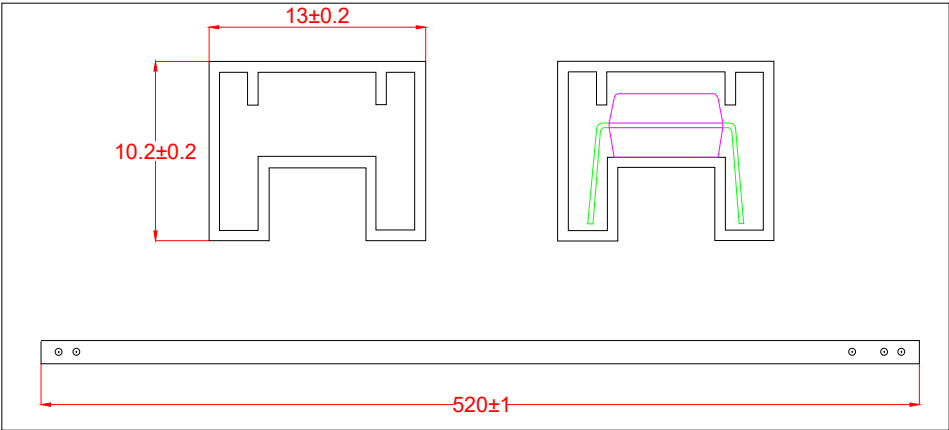


CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option S

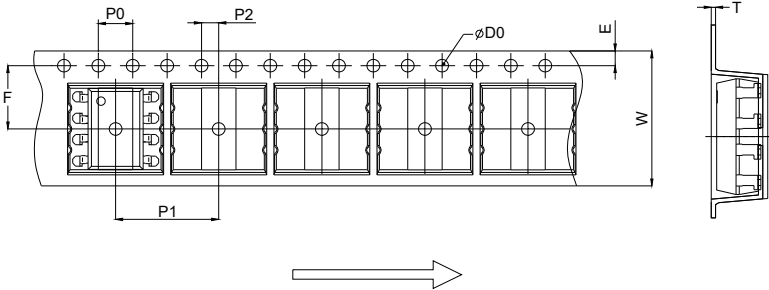


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	11.90	12.00	12.10	0.469	0.472	0.476
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.35	0.40	0.45	0.014	0.016	0.018
W	15.90	16.00	16.20	0.626	0.630	0.638

Option L

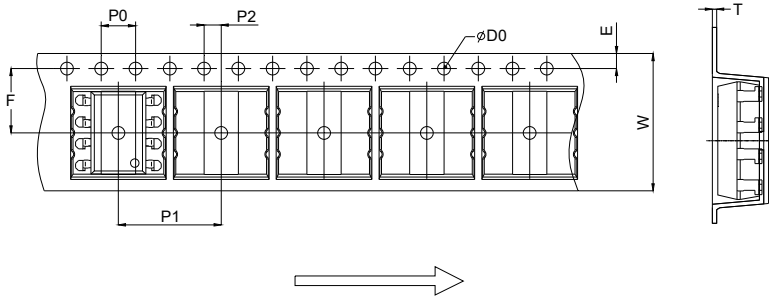


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	11.90	12.00	12.10	0.469	0.472	0.476
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.35	0.40	0.45	0.014	0.016	0.018
W	15.90	16.00	16.20	0.626	0.630	0.638

REFLOW INFORMATION

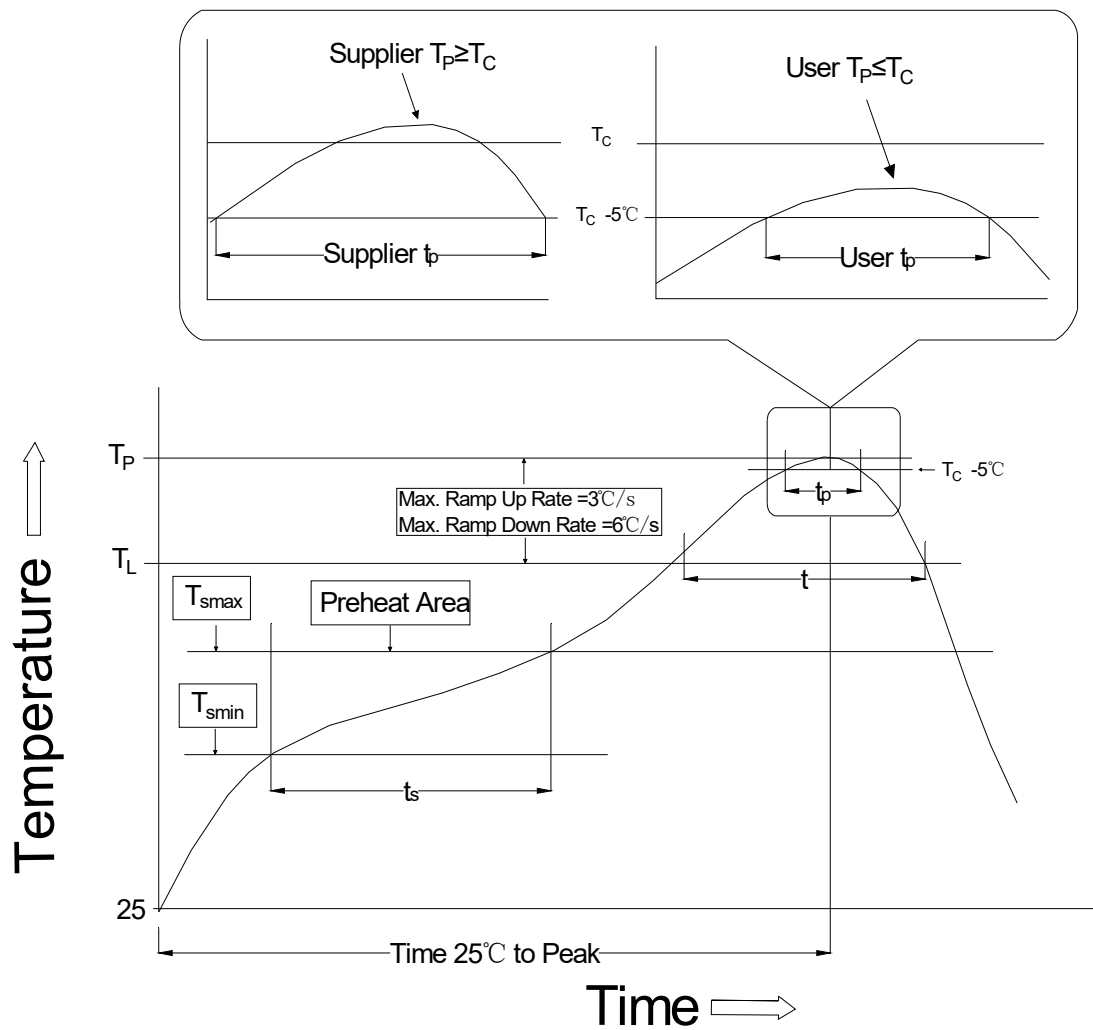

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (T_{smin})	100°C	150°C
Temperature Max. (T_{smax})	150°C	200°C
Time (t_s) from (T_{smin} to T_{smax})	60-120 seconds	60-120 seconds
Ramp-up Rate (t_L to T_P)	$3^\circ\text{C/second max.}$	$3^\circ\text{C/second max.}$
Liquidus Temperature (T_L)	183°C	217°C
Time (t_L) Maintained Above (T_L)	60-150 seconds	60-150 seconds
Peak Body Package Temperature	$235^\circ\text{C} + 0^\circ\text{C} / -5^\circ\text{C}$	$260^\circ\text{C} + 0^\circ\text{C} / -5^\circ\text{C}$
Time (t_P) within 5°C of 260°C	10 seconds	10 seconds
Ramp-down Rate (T_P to T_L)	$3-6^\circ\text{C/second}$	$3-6^\circ\text{C/second}$
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

WAVE SOLDERING

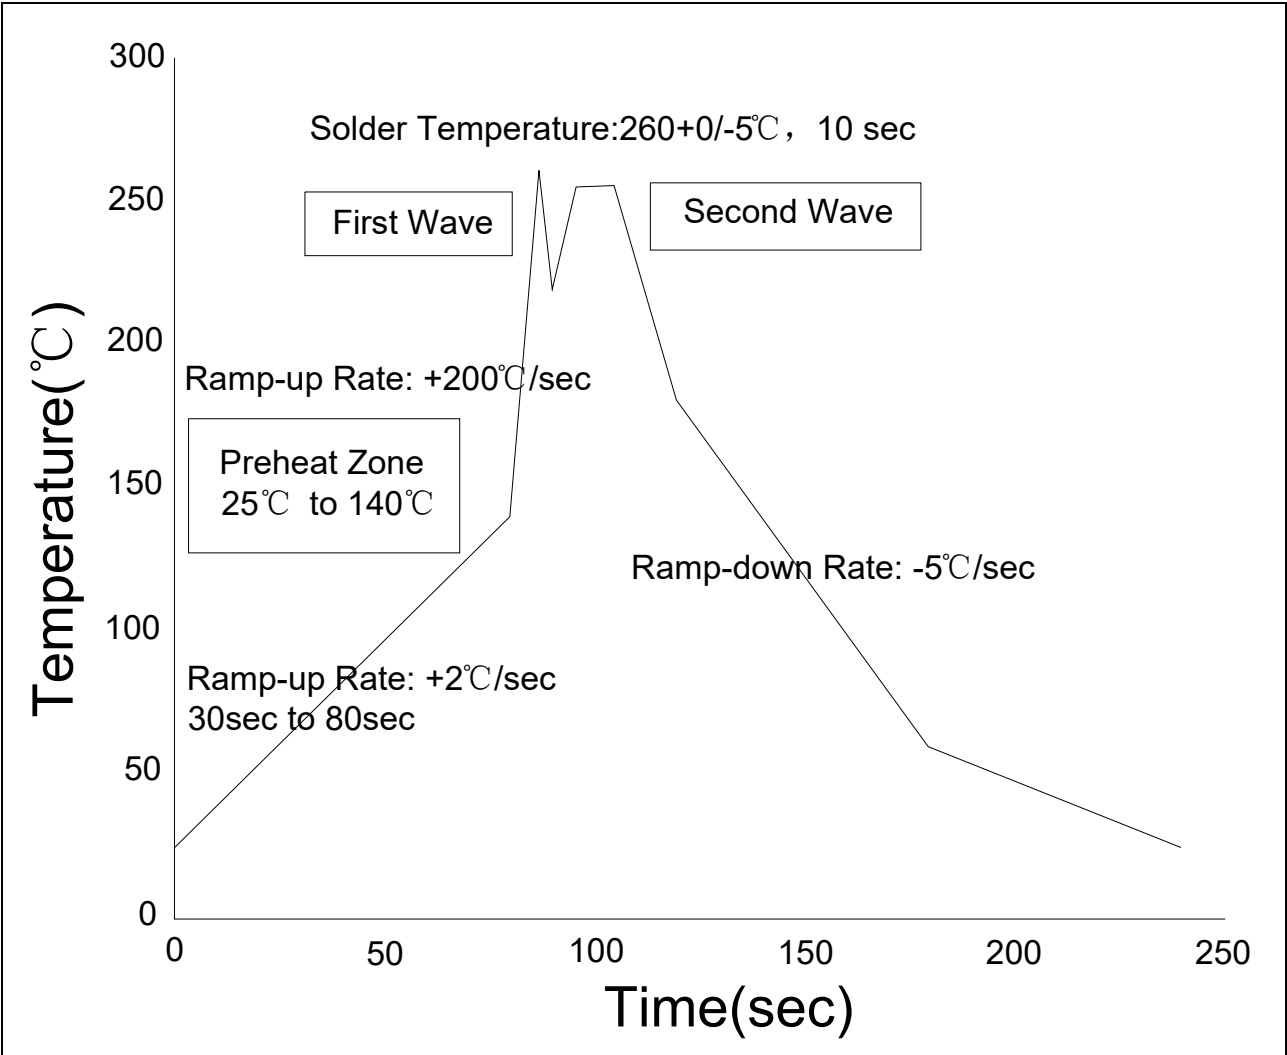

HAND SOLDERING BY SOLDERING IRON	
Soldering Temperature	360±5℃
Soldering Time	3s max.

Note:

1. Reflow soldering is recommended at the temperatures and times shown, no more than three times.
2. Avoid direct contact between the epoxy body and any tools or surfaces exceeding its maximum storage temperature.
3. Application of pressure on the epoxy body is prohibited at elevated temperatures. In specific scenarios, any applied force must not exceed 2.5N.
4. Ensure the component has cooled to ambient temperature before proceeding with any subsequent manufacturing steps.
5. The component has a shelf life of one year when stored under standard conditions.
6. Recommend storage Temp.: 0~40°C;
Recommend storage humidity: <60%;
MSL level: MSL 1

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2026 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.