

**JST134W-800E 1A TRIAC**


Rev.A.1.1

**DESCRIPTION:**

The JST134W-800E triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Package SOT-223-2L is RoHS compliant.

**MAIN FEATURES**

| Symbol                | Value       | Unit |
|-----------------------|-------------|------|
| $I_{T(RMS)}$          | 1           | A    |
| $V_{DRM}/V_{RRM}$     | 800         | V    |
| $I_{GT\ I/II/III/IV}$ | 10/10/10/25 | mA   |

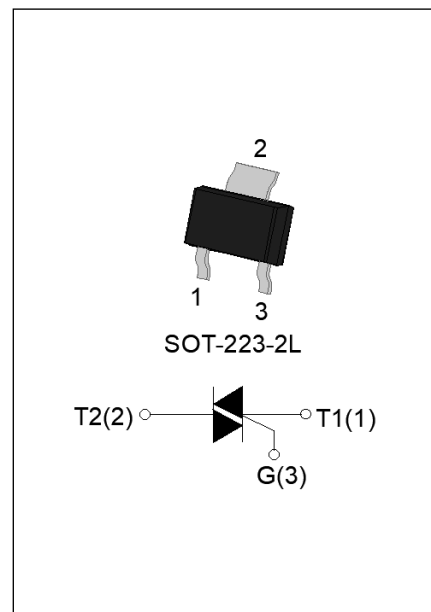
**ABSOLUTE MAXIMUM RATINGS**

| Parameter                                                                                                         |             | Symbol              | Value   | Unit             |
|-------------------------------------------------------------------------------------------------------------------|-------------|---------------------|---------|------------------|
| Storage junction temperature range                                                                                |             | T <sub>stg</sub>    | -40-150 | ℃                |
| Operating junction temperature range                                                                              |             | T <sub>j</sub>      | -40-125 | ℃                |
| Repetitive peak off-state voltage (T <sub>j</sub> =25℃)                                                           |             | V <sub>DRM</sub>    | 800     | V                |
| Repetitive peak reverse voltage (T <sub>j</sub> =25℃)                                                             |             | V <sub>RRM</sub>    | 800     | V                |
| RMS on-state current (T <sub>c</sub> ≤104℃)                                                                       |             | I <sub>T(RMS)</sub> | 1       | A                |
| Non repetitive surge peak on-state current<br>(full cycle , t <sub>p</sub> =20ms , T <sub>j</sub> =25℃)           |             | I <sub>TSM</sub>    | 20      | A                |
| Non repetitive surge peak on-state current<br>(full cycle , t <sub>p</sub> =16.6ms , T <sub>j</sub> =25℃)         |             |                     | 22      |                  |
| I <sup>2</sup> t value for fusing (t <sub>p</sub> =10ms , T <sub>j</sub> =25℃)                                    |             | I <sup>2</sup> t    | 2       | A <sup>2</sup> s |
| Critical rate of rise of on-state current<br>(I <sub>G</sub> =2×I <sub>GT</sub> , f=100Hz , T <sub>j</sub> =125℃) | I - II -III | dI/dt               | 70      | A/μs             |
|                                                                                                                   | IV          |                     | 40      |                  |
| Peak gate current (t <sub>p</sub> =20μs , T <sub>j</sub> =125℃)                                                   |             | I <sub>GM</sub>     | 2       | A                |
| Average gate power dissipation (T <sub>j</sub> =125℃)                                                             |             | P <sub>G(AV)</sub>  | 0.5     | W                |
| Peak gate power                                                                                                   |             | P <sub>GM</sub>     | 5       | W                |
| Peak pulse voltage<br>(T <sub>j</sub> =25℃; non-repetitive,off-state;FIG.8)                                       |             | V <sub>pp</sub>     | 4.2     | kV               |

**ELECTRICAL CHARACTERISTICS** ( $T_j=25^{\circ}\text{C}$  unless otherwise specified)

| Symbol      | Test Condition                                                                     | Quadrant     | Value |     | Unit                   |
|-------------|------------------------------------------------------------------------------------|--------------|-------|-----|------------------------|
| $I_{GT}$    | $V_D=12\text{V}$ $R_L=33\Omega$                                                    | I - II - III | MAX.  | 10  | mA                     |
|             |                                                                                    | IV           |       | 25  |                        |
| $V_{GT}$    |                                                                                    | ALL          | MAX.  | 1.3 | V                      |
| $V_{GD}$    | $V_D=V_{DRM}$ $T_j=125^{\circ}\text{C}$<br>$R_L=3.3\text{k}\Omega$                 | ALL          | MIN.  | 0.2 | V                      |
| $I_L$       | $I_G=1.2I_{GT}$                                                                    | I - III - IV | MAX.  | 15  | mA                     |
|             |                                                                                    | II           |       | 25  |                        |
| $I_H$       | $I_T=100\text{mA}$                                                                 |              | MAX.  | 20  | mA                     |
| $dV/dt$     | $V_D=540\text{V}$ Gate Open $T_j=110^{\circ}\text{C}$                              |              | MIN.  | 250 | $\text{V}/\mu\text{s}$ |
| $(dV/dt)_c$ | $(dI/dt)_c=1.8\text{A/ms}$ , $T_j=110^{\circ}\text{C}$                             |              | MIN.  | 6   | $\text{V}/\mu\text{s}$ |
| $t_{on}$    | $I_G=40\text{mA}$ $I_A=200\text{mA}$ $I_R=20\text{mA}$<br>$T_j=25^{\circ}\text{C}$ |              | TYP.  | 3   | $\mu\text{s}$          |
| $t_{off}$   |                                                                                    |              |       | 30  |                        |


**STATIC CHARACTERISTICS**

| Symbol    | Parameter                               |                           | Value(MAX.) | Unit             |
|-----------|-----------------------------------------|---------------------------|-------------|------------------|
| $V_{TM}$  | $I_{TM}=5\text{A}$ $t_p=380\mu\text{s}$ | $T_j=25^{\circ}\text{C}$  | 1.55        | V                |
| $V_{TO}$  | Threshold voltage                       | $T_j=125^{\circ}\text{C}$ | 0.92        | V                |
| $R_D$     | Dynamic resistance                      | $T_j=125^{\circ}\text{C}$ | 107         | $\text{m}\Omega$ |
| $I_{DRM}$ | $V_D=V_{DRM}$ $V_R=V_{RRM}$             | $T_j=25^{\circ}\text{C}$  | 5           | $\mu\text{A}$    |
| $I_{RRM}$ |                                         | $T_j=125^{\circ}\text{C}$ | 0.35        | mA               |


**THERMAL RESISTANCES**







| Symbol        | Parameter                | Value | Unit                        |
|---------------|--------------------------|-------|-----------------------------|
| $R_{th(j-c)}$ | junction to case (AC)    | 18    | $^{\circ}\text{C}/\text{W}$ |
| $R_{th(j-a)}$ | junction to ambient (AC) | 150   | $^{\circ}\text{C}/\text{W}$ |

ORDERING INFORMATION

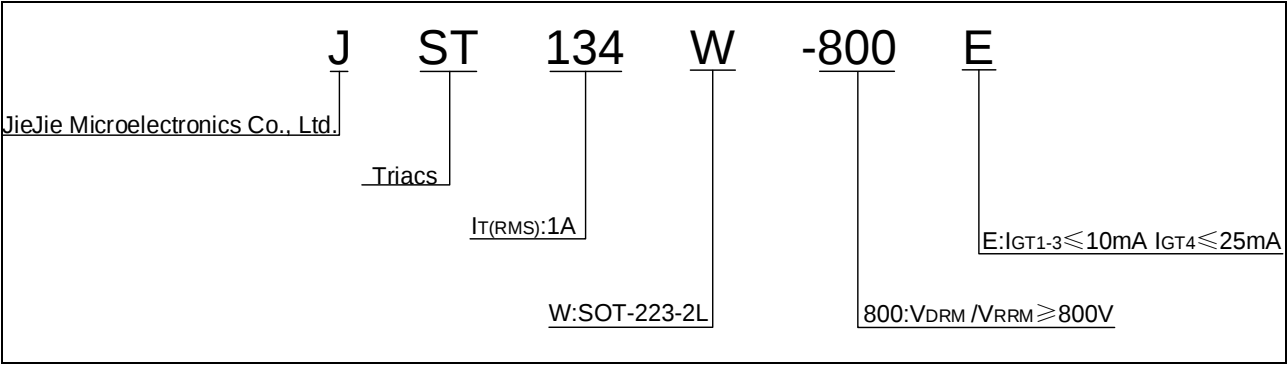

MARKING

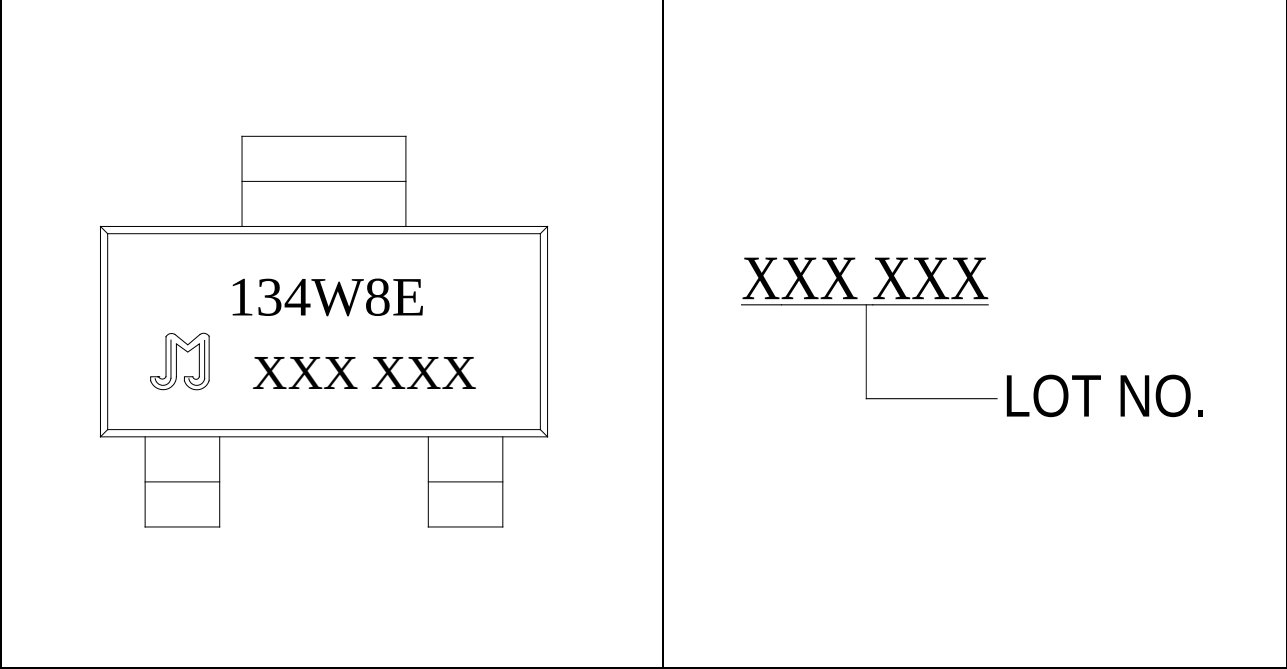

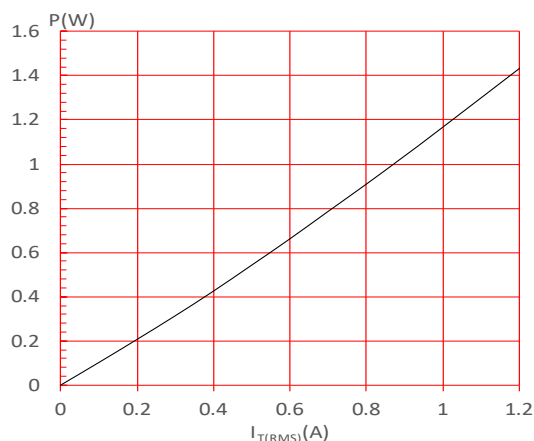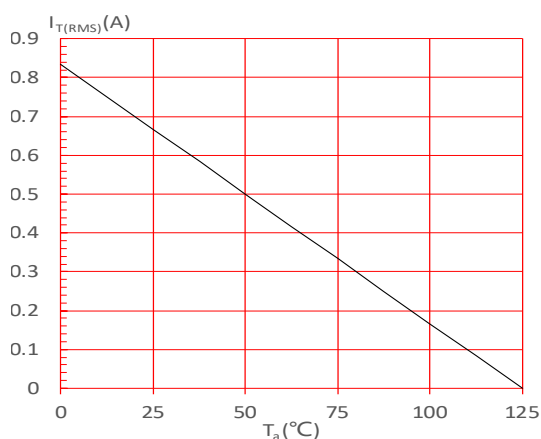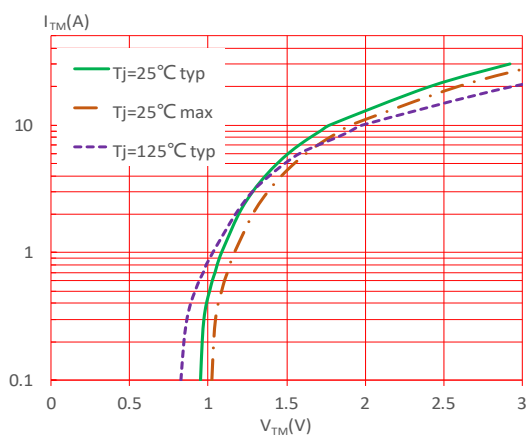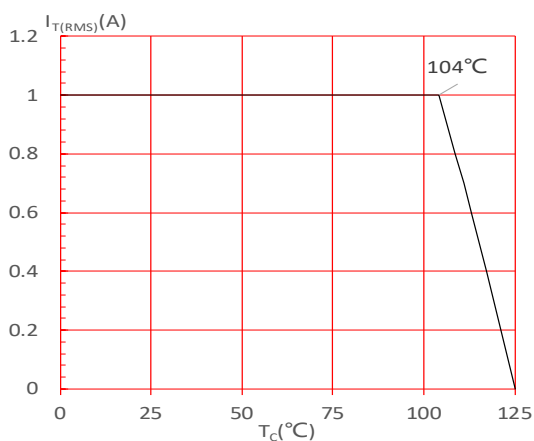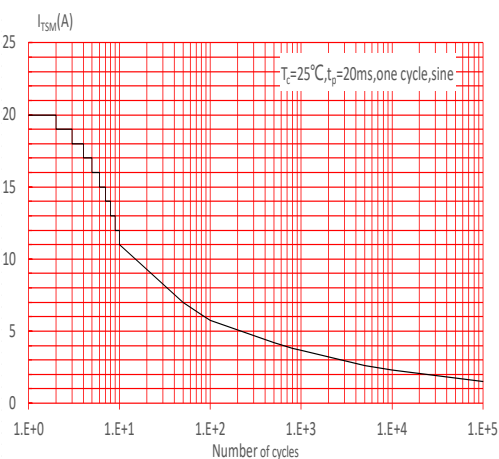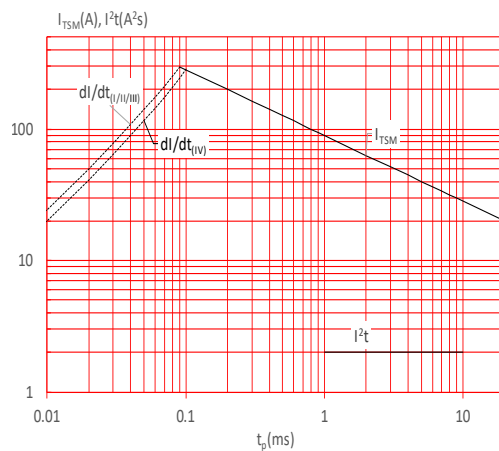**FIG.1:** Maximum power dissipation versus RMS on-state current**FIG.3:** RMS on-state current versus ambient temperature (printed circuit board FR4, copper thickness: 35 $\mu m$ ) (full cycle)**FIG.5:** On-state characteristics**FIG.2:** RMS on-state current versus case temperature**FIG.4:** Surge peak on-state current versus number of cycles**FIG.6:** Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20ms$ , and corresponding value of  $I^2t$  (I - II - III:  $di/dt < 70A/\mu s$ ; IV:  $di/dt < 40A/\mu s$ )

**FIG.7:** Relative variations of gate trigger current, holding current and latching current versus junction temperature



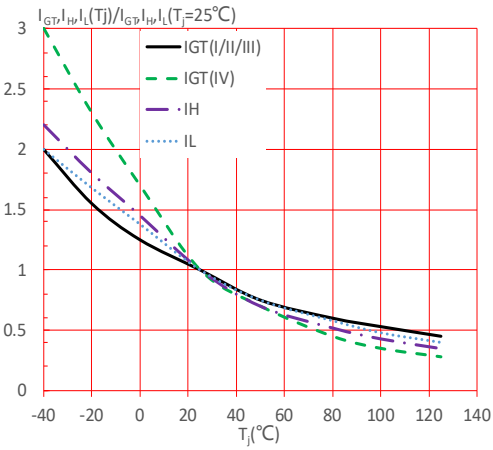


FIG.8: Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

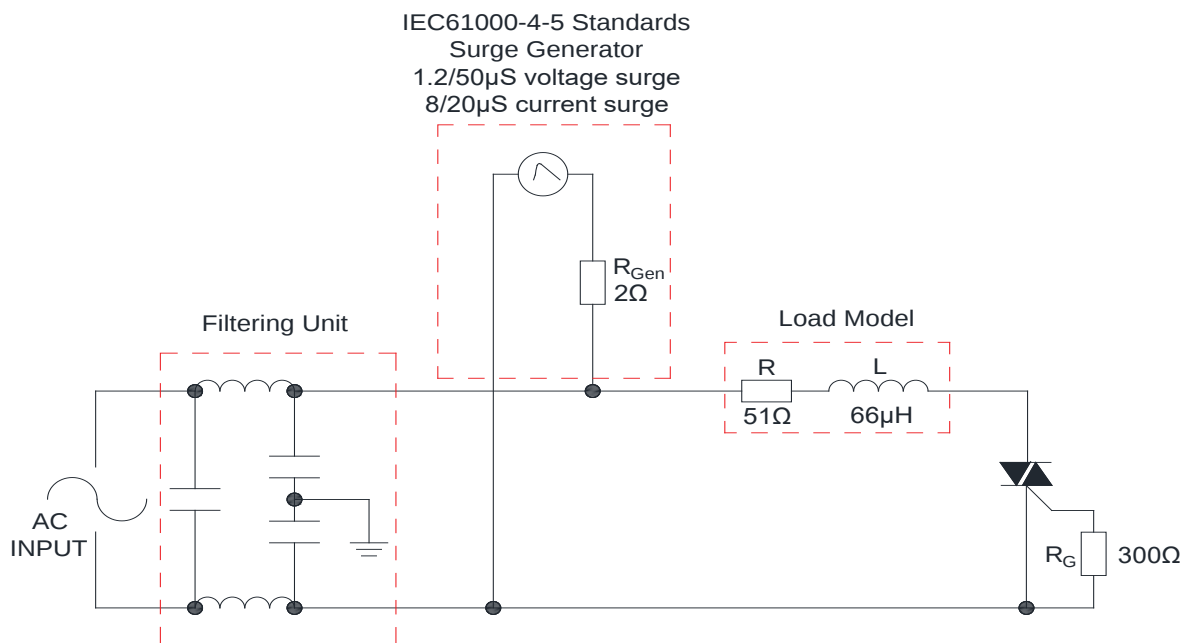

## SOLDERING PARAMETERS

| Reflow Condition                                          |                                      | Pb-Free assembly<br>(see figure at right) |
|-----------------------------------------------------------|--------------------------------------|-------------------------------------------|
| Pre Heat                                                  | -Temperature Min<br>( $T_{s(min)}$ ) | +150°C                                    |
|                                                           | -Temperature<br>Max( $T_{s(max)}$ )  | +200°C                                    |
|                                                           | -Time (Min to Max) ( $t_s$ )         | 60-180 secs.                              |
| Average ramp up rate<br>(Liquidus Temp ( $T_L$ ) to peak) |                                      | 3°C/sec. Max                              |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                      |                                      | 3°C/sec. Max                              |
| Reflow                                                    | -Temperature( $T_L$ )<br>(Liquidus)  | +217°C                                    |
|                                                           | -Temperature( $t_L$ )                | 60-150 secs.                              |
| Peak Temp ( $T_p$ )                                       |                                      | +260(+0/-5)°C                             |
| Time within 5°C of actual<br>Peak Temp ( $t_p$ )          |                                      | 20-40secs.                                |
| Ramp-down Rate                                            |                                      | 6°C/sec. Max                              |
| Time 25°C to Peak Temp ( $T_p$ )                          |                                      | 8 min. Max                                |
| Do not exceed                                             |                                      | +260°C                                    |

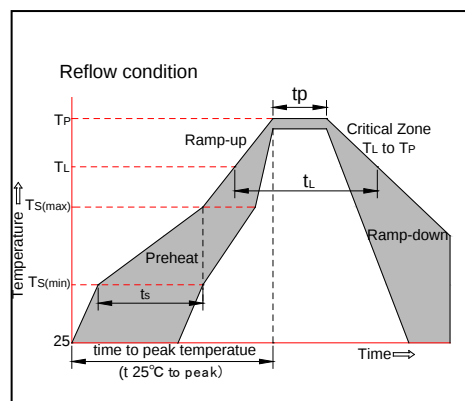


## ORDERING INFORMATION

| Order code   | Voltage<br>$V_{\text{DRM}}/V_{\text{RRM}}$ (V) | IGT(mA)      |    | Package    | Base qty.<br>(pcs) | Delivery<br>mode |
|--------------|------------------------------------------------|--------------|----|------------|--------------------|------------------|
|              |                                                | I - II - III | IV |            |                    |                  |
| JST134W-800E | 800                                            | 10           | 25 | SOT-223-2L | 4,000              | Tape & Reel      |

## Document Revision History


| Date         | Revision | Changes                        |
|--------------|----------|--------------------------------|
| Apr.14, 2023 | A.1.0    | Last updated                   |
| Oct.24, 2025 | A.1.1    | Revise PACKAGE MECHANICAL DATA |

PACKAGE MECHANICAL DATA

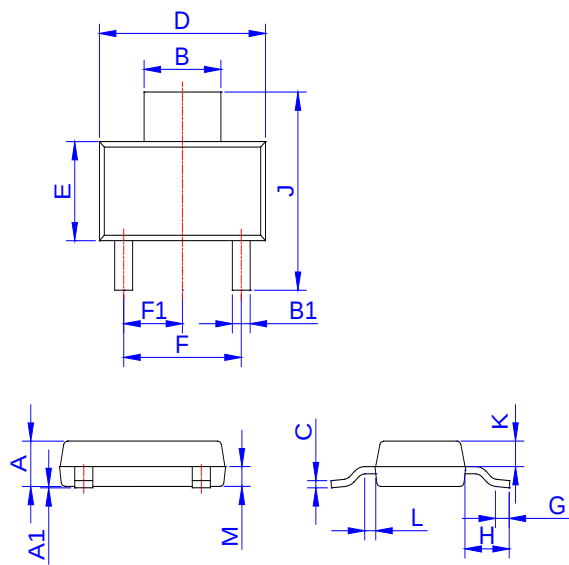

| Ref. | Dimensions  |       |      |        |       |       |
|------|-------------|-------|------|--------|-------|-------|
|      | Millimeters |       |      | Inches |       |       |
|      | Min.        | Typ.  | Max. | Min.   | Typ.  | Max.  |
| A    | 1.50        | 1.60  | 1.80 | 0.059  | 0.063 | 0.071 |
| A1   | 0.01        | 0.06  | 0.10 | 0.001  | 0.002 | 0.004 |
| B    | 2.90        | 3.00  | 3.10 | 0.114  | 0.118 | 0.122 |
| B1   | 0.60        | 0.70  | 0.80 | 0.024  | 0.028 | 0.031 |
| C    | 0.22        | 0.254 | 0.32 | 0.009  | 0.010 | 0.013 |
| D    | 6.30        | 6.50  | 6.70 | 0.248  | 0.256 | 0.264 |
| E    | 3.30        | 3.50  | 3.70 | 0.130  | 0.138 | 0.146 |
| F    | 4.40        |       | 4.80 | 0.173  |       | 0.189 |
| F1   | 2.20        |       | 2.40 | 0.087  |       | 0.094 |
| G    | 0.50        |       | 1.00 | 0.020  |       | 0.039 |
| H    | 1.50        | 1.75  | 2.00 | 0.059  | 0.069 | 0.079 |
| J    | 6.70        | 7.00  | 7.30 | 0.264  | 0.276 | 0.287 |
| K    | 0.80        |       | 1.00 | 0.031  |       | 0.039 |
| L    | 0.40        |       | 0.80 | 0.016  |       | 0.031 |
| M    | 0.75        |       | 0.95 | 0.030  |       | 0.037 |

FOOTPRINT-SOT-223-2L (dimensions in mm)

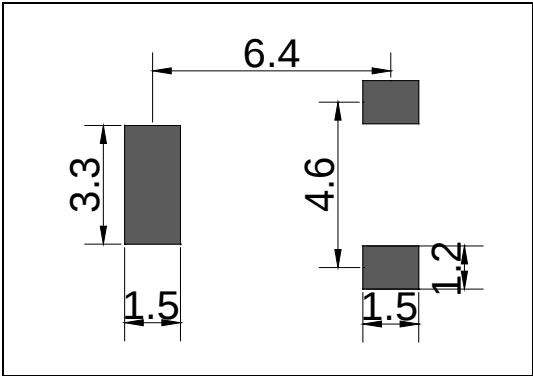

Technical drawing of a 6-hole circular plate. The drawing includes a top view, a side view (B-B), and a section view (A-A).

**Top View Dimensions:**

- Overall diameter:  $\phi 330 \pm 2.0$
- Inner diameter of the central hole:  $\phi 30 \pm 0.2$
- Radius of the central hole:  $R 12.8$
- Distance from the center to the edge of the central hole:  $2.3 \pm 0.2$

**Side View (B-B) Dimensions:**

- Overall thickness:  $1.96 \pm 0.2$
- Distance from the top surface to the center of the central hole:  $12.8 \pm 0.5$
- Distance from the bottom surface to the center of the central hole:  $100 \pm 0.5$
- Distance from the bottom surface to the edge of the central hole:  $16.72 \pm 0.3$

**Section View (A-A) Dimensions:**

- Overall width:  $W$
- Distance from the top surface to the center of the central hole:  $E$
- Distance from the bottom surface to the center of the central hole:  $F$
- Distance from the center of the central hole to the edge of the central hole:  $A$
- Distance from the center of the central hole to the edge of the central hole:  $A_0$
- Angle of the central hole:  $8^\circ$

| Ref. | Dimensions  |       |       |        |       |       |
|------|-------------|-------|-------|--------|-------|-------|
|      | Millimeters |       |       | Inches |       |       |
|      | Min.        | Typ.  | Max.  | Min.   | Typ.  | Max.  |
| W    | -           | -     | 12.30 | -      |       | 0.482 |
| E    | 1.65        | 1.75  | 1.85  | 0.065  | 0.069 | 0.073 |
| F    | 5.45        | 5.50  | 5.55  | 0.215  | 0.217 | 0.219 |
| D0   | 1.50        | 1.55  | 1.60  | 0.059  | 0.061 | 0.063 |
| D1   | 1.50        | -     | -     | 0.059  | -     | -     |
| P0   | 3.90        | 4.00  | 4.10  | 0.154  | 0.157 | 0.161 |
| P1   | 7.90        | 8.00  | 8.10  | 0.311  | 0.315 | 0.319 |
| P2   | 1.95        | 2.00  | 2.05  | 0.077  | 0.079 | 0.081 |
| 10P0 | 39.80       | 40.00 | 40.20 | 1.567  | 1.575 | 1.583 |
| A0   | 6.85        | 6.95  | 7.05  | 0.269  | 0.273 | 0.276 |
| B0   | 7.15        | 7.25  | 7.35  | 0.280  | 0.284 | 0.288 |
| K0   | 1.95        | 2.05  | 2.15  | 0.076  | 0.080 | 0.084 |
| T    | 0.20        | 0.25  | 0.30  | 0.008  | 0.010 | 0.012 |

| PACKAGE    | OUTLINE | REEL<br>(PCS) | PER CARTON<br>(PCS) | TAPE & REEL |
|------------|---------|---------------|---------------------|-------------|
| SOT-223-2L | TAPING  | 4,000         | 40,000              | 13 inch     |

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.